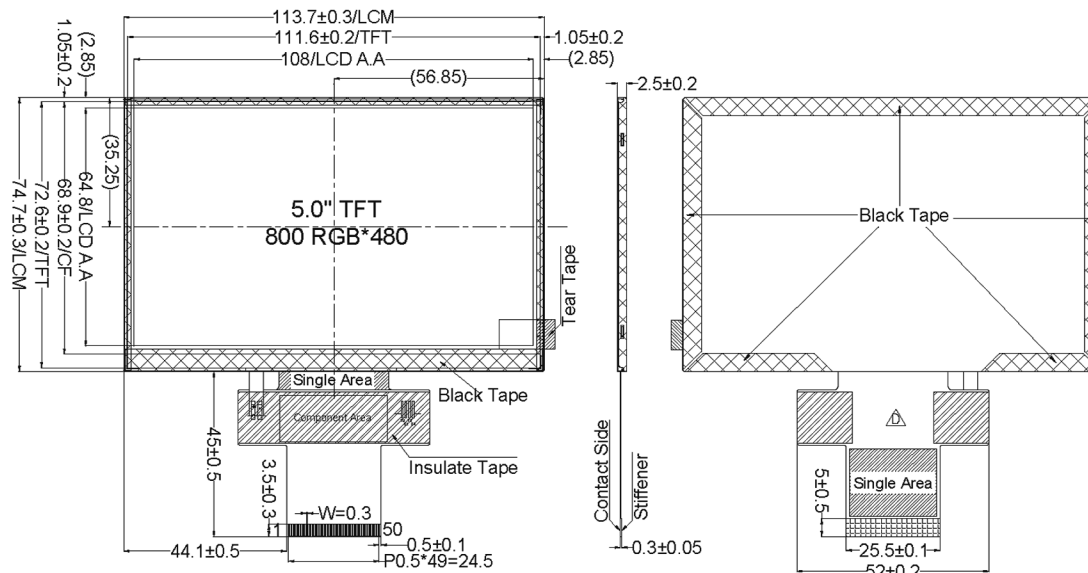


NO.	PIN NAME
1	GND
2	VLED-
3	VLED+
4	GND
5	L/R
6	U/D
7	R7
8	R6
9	R5
10	R4
11	R3
12	R2
13	R1
14	R0
15	GND
16	G7
17	G6
18	G5
19	G4
20	G3
21	G2
22	G1
23	G0
24	GND
25	DE
26	VSYNC
27	HSYNC
28	GND
29	CLK
30	GND
31	B7
32	B6
33	B5
34	B4
35	B3
36	B2
37	B1
38	B0
39	GRB
40	CS
41	SDA
42	SCL
43	VDD
44	DISP
45	GND
46	NC(YU)
47	NC(XL)
48	NC(YD)
49	NC(XR)
50	GND

NOTES:

1. Display size: 5.0" TFT
 2. Viewing direction: Full Viewing
 3. Display mode: Transmissive/Normal Black/Glare
 4. Operation temperature: -20°C~+70°C
 5. Storage temperature: -30°C~+80°C
 6. Power supply voltage: 3.3V
 7. Driver IC: ST7262
 8. Backlight: White(12 LED)/18.6V/40mA
 9. Brightness: 480(TYP)cd/m2
 10. ROHS must be complied
- *Unspecification tolerance are ±0.2mm
 *The dimension with mark brackets "()" just for reference

Compliance: RohS III(2015/863/EU)

Tolerances:			Date	Name	YDP LCD I 500 SR		
			02/24	dr			
			knitter-switch		30 53 27		Page
							1/25
Renamed	04/24	dr					
Modifications	Date	Name					

PRODUCT SPECIFICATION

5.0” IPS TFT LCD MODULE
MODEL: YDP LCD I 500 SR Ver:1.4



- < ◇ > Preliminary Specification
- < ◆ > Finally Specification

CUSTOMER’S APPROVAL	
CUSTOMER :	
SIGNATURE:	DATE:

APPROVED BY	PM REVIEWED	PD REVIEWED	PREPARED BY

Revision History

Revision	Date	Originator	Detail	Remarks
1.0	2019.10.07	ZDT	Initial Release	
1.1	2019.11.27	ZDT	Modify Backlight Characteristics Modify Outline Drawing	P5 P25
1.2	2019.12.27	ZDT	Add Weight Add Current Consumption Add Chromaticity Transmissive	P4 P5 P6
1.3	2020.03.20	ZDT	Modify Luminance on TFT Modify Inspection Specification Modify Outline Drawing	P6 P19 P25
1.4	2021.03.05	ZJW	Modify Reliability Specification Modify Outline Drawing	P21 P25

Table of Contents

No.	Item	Page
1.	General Description.....	4
2.	Module Parameter.....	4
3.	Absolute Maximum Ratings.....	4
4.	DC Characteristics.....	5
5.	Backlight Characteristics.....	5
5.1.	Backlight Characteristics.....	5
5.2.	Backlighting circuit.....	5
6.	Optical Characteristics.....	6
6.1.	Optical Characteristics.....	6
6.2.	Definition of Response Time.....	6
6.3.	Definition of Contrast Ratio.....	7
6.4.	Definition of Viewing Angles.....	7
6.5.	Definition of Color Appearance.....	8
6.6.	Definition of Surface Luminance, Uniformity and Transmittance.....	8
7.	Block Diagram and Power Supply.....	9
8.	Interface Pins Definition.....	10
9.	AC Characteristics.....	12
9.1.	System Bus Timing for 3-Wire SPI Interface.....	12
9.2.	System Bus Timing for RGB Interface.....	12
9.3.	Parallel 24-bit RGB Input Timing Table.....	13
10.	Power on/off Sequence.....	14
11.	Quality Assurance.....	15
11.1.	Purpose.....	15
11.2.	Standard for Quality Test.....	15
11.3.	Nonconforming Analysis & Disposition.....	15
11.4.	Agreement Items.....	15
11.5.	Standard of the Product Visual Inspection.....	15
11.6.	Inspection Specification.....	16
11.7.	Classification of Defects.....	20
11.8.	Identification/marketing criteria.....	20
11.9.	Packing.....	20
12.	Reliability Specification.....	21
13.	Precautions and Warranty.....	22
13.1.	Safety.....	22
13.2.	Handling.....	22
13.3.	Storage.....	22
13.4.	Metal Pin (Apply to Products with Metal Pins).....	22
13.5.	Operation.....	23
13.6.	Static Electricity.....	23
13.7.	Limited Warranty.....	23
14.	Packaging.....	24

1. General Description

The specification is a transmissive type color active matrix liquid crystal display (LCD) which uses amorphous thin film transistor (TFT) as switching devices. This product is composed of a TFT-LCD panel, driver Ics and a backlight unit.

2. Module Parameter

Features	Details	Unit
Display Size(Diagonal)	5.0"	
LCD type	IPS TFT	
Display Mode	Normally Black/Transmissive	
Resolution	800 RGB x 480	Pixels
View Direction	Full viewing	Best Image
Module Outline	113.7 (H) x 74.7(V) x 2.5(T) (Note1)	mm
Active Area	108 (H) x 64.8(V)	mm
Pixel Size	135 (H) x 135(V)	um
Pixel Arrangement	RGB Vertical Stripe	
Polarizer Surface Treatment	Glare	
Display Colors	16.7M	
Interface	3 wire SPI + 24bit RGB interface	
With or Without Touch Panel	Without	
Operating Temperature	-20~70	°C
Storage Temperature	-30~80	°C
Weight	41	g

Note 1: Exclusive hooks, posts, FFC/FPC tail etc.

3. Absolute Maximum Ratings

GND=0V, Ta=25°C

Item	Symbol	Min.	Max.	Unit
Supply Voltage	VDD	-0.3	4.0	V
Storage temperature	T _{STG}	-30	80	°C
Operating temperature	T _{OP}	-20	70	°C

Note 1: If Ta below 50°C, the maximal humidity is 90%RH, if Ta over 50°C, absolute humidity should be less than 60%RH.

Note 2: The response time will be extremely slow when the operating temperature is around -10°C, and the back ground will become darker at high temperature operating.

4. DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	VDD	3.3	3.3	3.6	V
Logic Low input voltage	V _{IL}	GND	-	0.3*VDD	V
Logic High input voltage	V _{IH}	0.7*VDD	-	VDD	V
Output low voltage	V _{OL}	GND	-	GND+0.4	V
Output high voltage	V _{OH}	VDD-0.4	-	VDD	V
Current Consumption All white	I _{DD}	-	60	-	mA

5. Backlight Characteristics


5.1. Backlight Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Backlight Voltage	V _{LED}	Ta=25 °C, I _F =20mA/LED	17.4	18.6	19.8	V
Backlight Current	I _{LED}	Ta=25 °C, V _F =3.1V/LED	-	40	-	mA
Power dissipation	P _D		-	744	-	mW
Uniformity	Avg		-	80	-	%
LED working life(25°C)	-		-	30000	-	Hrs
Drive method	Constant current					
LED Configuration	12 White LEDs (6 LEDs in one string and 2 groups in parallel)					

Note1: LED life time defined as follows: The final brightness is at 50% of original brightness.

The environmental conducted under ambient air flow, at Ta=25±2 °C, 60%RH±5%, I_F=20mA/LED.

5.2. Backlighting circuit

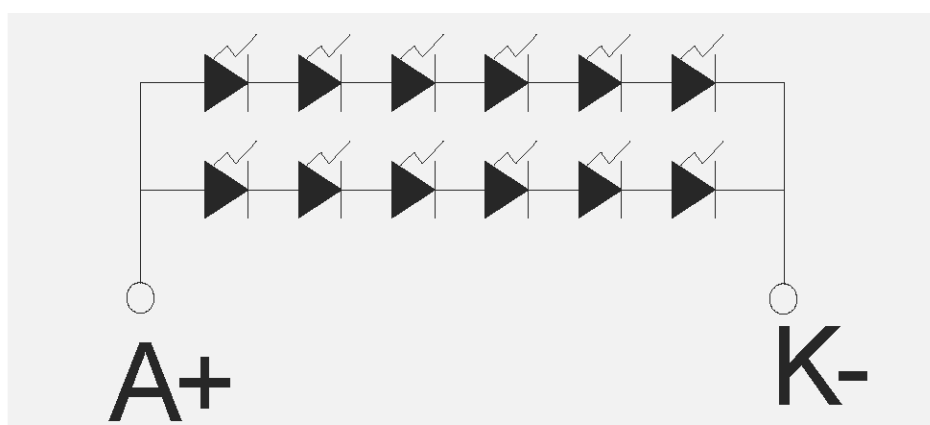

6. Optical Characteristics


6.1. Optical Characteristics

Ta=25°C, VDD=3.3V

Backlight On (Transmissive Mode)	Item		Symbol	Condition	Specification			Unit
					Min.	Typ.	Max.	
	Luminance on TFT(I_f =20mA/LED)		Lv	Normally viewing angle $\theta_x = \phi_y = 0^\circ$	380	480	-	cd/m ²
	Contrast ratio(See 6.3)		CR		(800)	(1000)	-	
	Response time (See 6.2)		Tr+Tf		-	30	40	ms
	Chromaticity Transmissive (See 6.5)	Red	X _R		0.554	0.604	0.654	
			Y _R		0.305	0.355	0.405	
		Green	X _G		0.297	0.347	0.397	
			Y _G		0.553	0.603	0.653	
		Blue	X _B		0.093	0.143	0.193	
Y _B			0.065		0.115	0.165		
White		X _w	0.260		0.310	0.360		
		Y _w	0.316		0.366	0.416		
Viewing Angle (See 6.4)	Horizontal	θ_{x+}	Center CR≥10	70	80	-	Deg.	
		θ_{x-}		70	80	-		
	Vertical	ϕ_{y+}		70	80	-		
		ϕ_{y-}		70	80	-		
	NSTC			$\Theta=0^\circ$	45	50		%

6.2. Definition of Response Time

6.2.1. Normally Black Type (Negative)

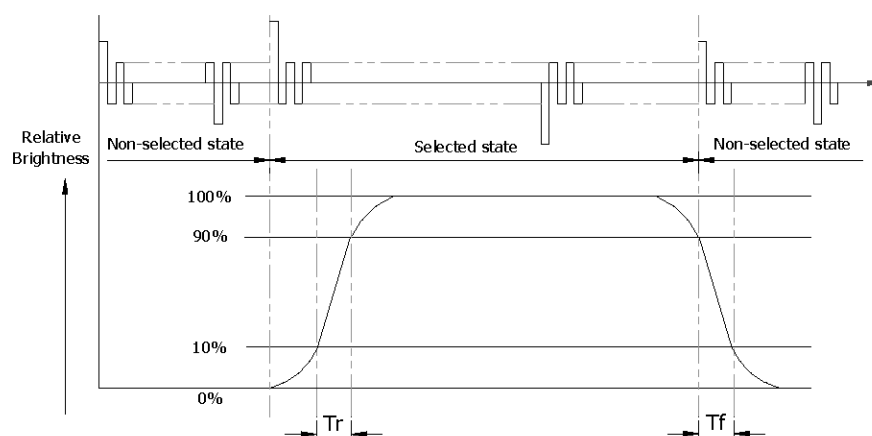


Tr is the time it takes to change from non-selected stage with relative luminance 10% to selected state with relative luminance 90%;

Tf is the time it takes to change from selected state with relative luminance 90% to non-selected state with relative luminance 10%

Note: Measuring machine: LCD-5100

6.2.2. Normally White Type (Positive)

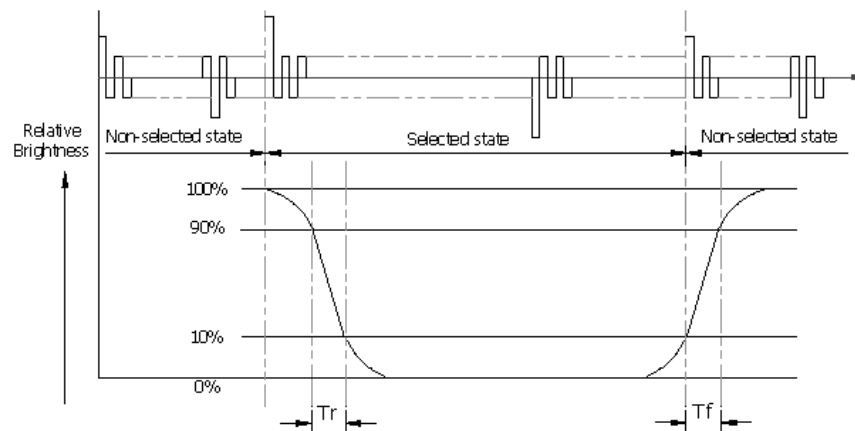

T_r is the time it takes to change from non-selected stage with relative luminance 90% to selected state with relative luminance 10%;

T_f is the time it takes to change from selected state with relative luminance 10% to non-selected state with relative luminance 90%;

Note: Measuring machine: LCD-5100 or EQUI


6.3. Definition of Contrast Ratio

Contrast is measured perpendicular to display surface in reflective and transmissive mode. The measurement condition is:

Measuring Equipment	Eldim or Equivalent
Measuring Point Diameter	3mm//1mm
Measuring Point Location	Active Area centre point
Test pattern	A: All Pixels white
	B: All Pixel black
Contrast setting	Maximum

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel

6.4. Definition of Viewing Angles

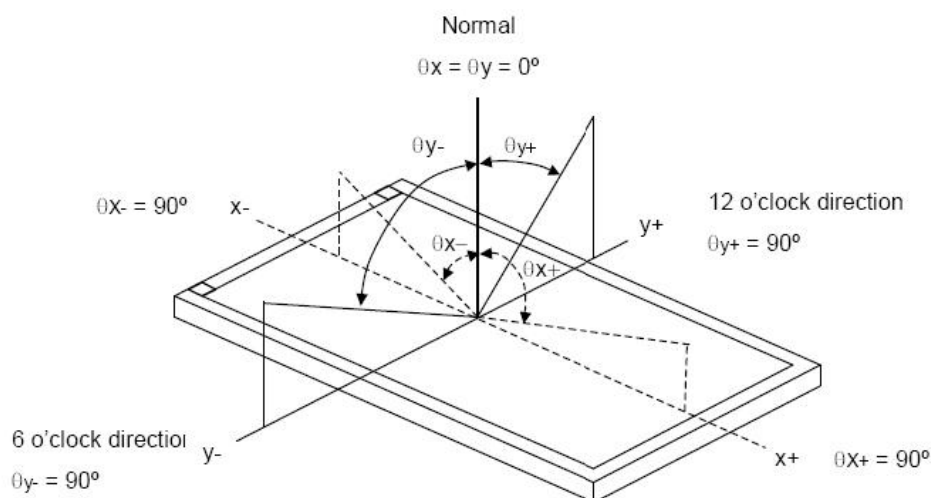


Measuring machine: LCD-5100 or EQUI

6.5. Definition of Color Appearance

R,G,B and W are defined by (x, y) on the IE chromaticity diagram

NTSC=area of RGB triangle/area of NTSC triangleX100%

Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)

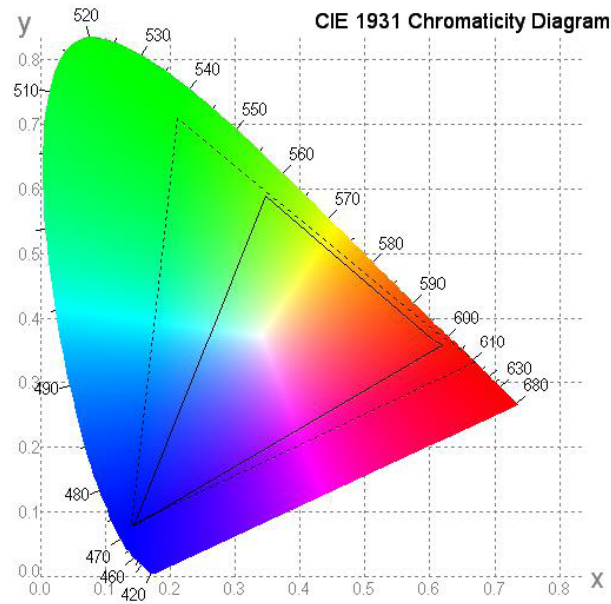

6.6. Definition of Surface Luminance, Uniformity and Transmittance


Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.

6.6.1. Surface Luminance: $L_v = \text{average } (L_{P1}:L_{P9})$


6.6.2. Uniformity = $\text{Minimal } (L_{P1}:L_{P9}) / \text{Maximal } (L_{P1}:L_{P9}) * 100\%$

6.6.3. Transmittance = $L_v \text{ on LCD} / L_v \text{ on Backlight} * 100\%$

Note: Measuring machine: BM-7

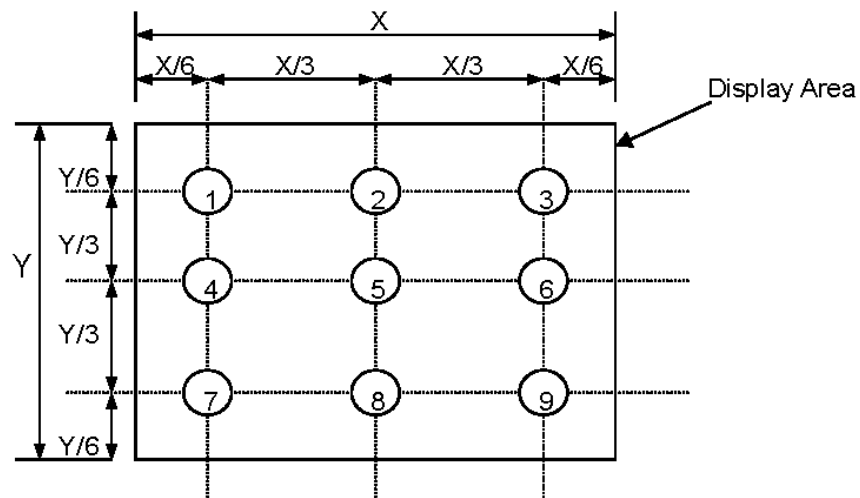

7. Block Diagram and Power Supply

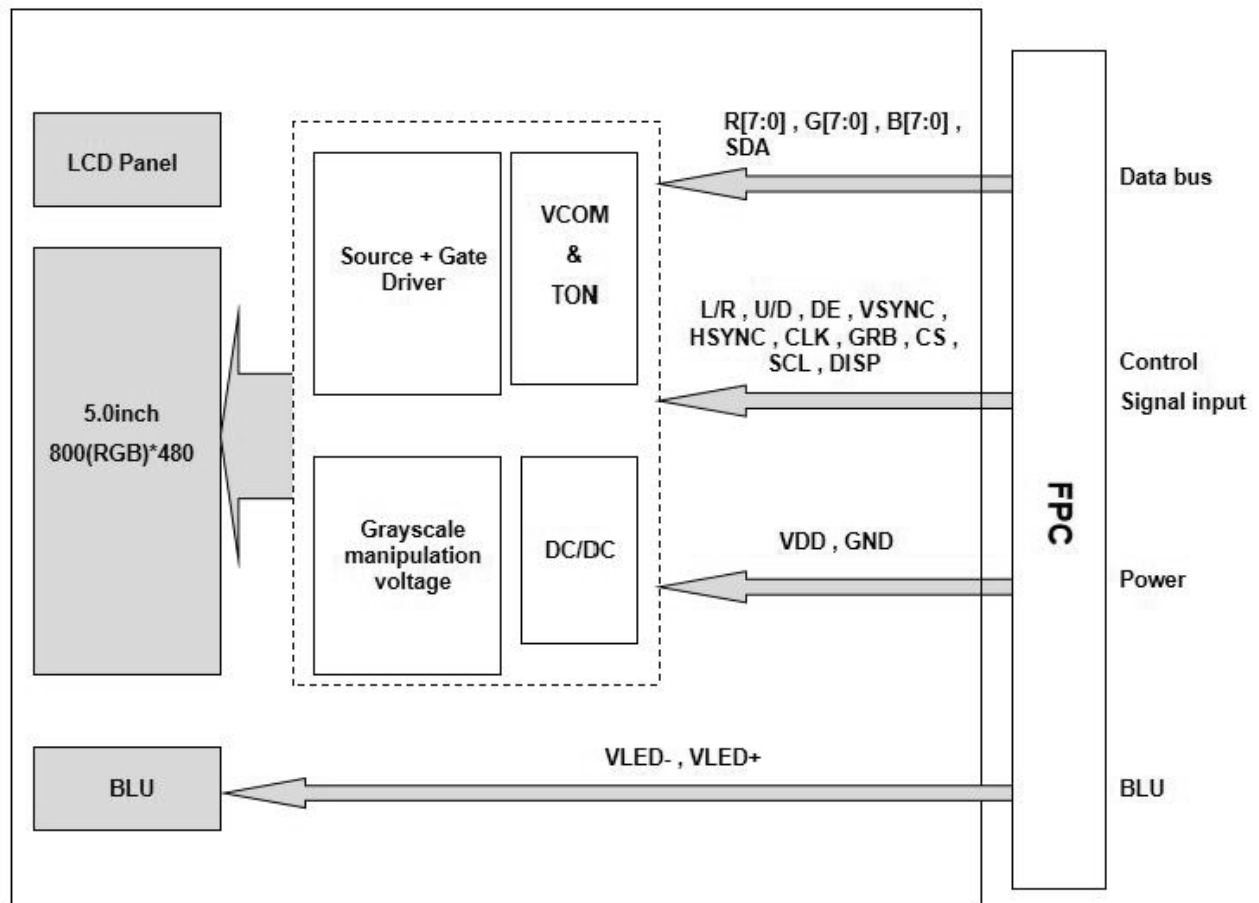

8. Interface Pins Definition

No.	Symbol	Function	Remark
1	GND	Ground	
2	VLED-	LED Cathode	
3	VLED+	LED Anode	
4	GND	Ground	
5	L/R	Left / right selection	Note 1
6	U/D	Up / Down selection	Note 2
7	R7	Red data(MSB)	
8	R6	Red data	
9	R5	Red data	
10	R4	Red data	
11	R3	Red data	
12	R2	Red data	
13	R1	Red data	
14	R0	Red data(LSB)	
15	GND	Ground	
16	G7	Green data(MSB)	
17	G6	Green data	
18	G5	Green data	
19	G4	Green data	
20	G3	Green data	
21	G2	Green data	
22	G1	Green data	
23	G0	Green data(LSB)	
24	GND	Ground	
25	DE	Data Input Enable	
26	VSYNC	Vertical Sync Input	
27	HSYNC	Horizontal Sync Input	
28	GND	Ground	
29	CLK	Sample clock	
30	GND	Ground	
31	B7	Blue data(MSB)	
32	B6	Blue data	
33	B5	Blue data	
34	B4	Blue data	
35	B3	Blue data	
36	B2	Blue data	
37	B1	Blue data	
38	B0	Blue data(LSB)	
39	GRB	Global reset pin	
40	CS	Serial communication chip selection	

41	SDA	Serial Data Input/output	
42	SCL	Serial communication clock input	
43	VDD	Power for Digital Circuit	
44	DISP	DISP sets the display mode DISP=" H " Normal display mode; DISP=" L " Standby mode	
45	GND	Ground	
46	NC(YU)	No connection	
47	NC(XL)	No connection	
48	NC(YD)	No connection	
49	NC(XR)	No connection	
50	GND	Ground	

Note 1: Source Right or Left sequence control. Normally pulled high.


L/R="0": From right to left

L/R="1": From left to right

Note 2: Gate up or down scan control. Normally pulled low.

U/D="0": From down to up

U/D="1": From up to down

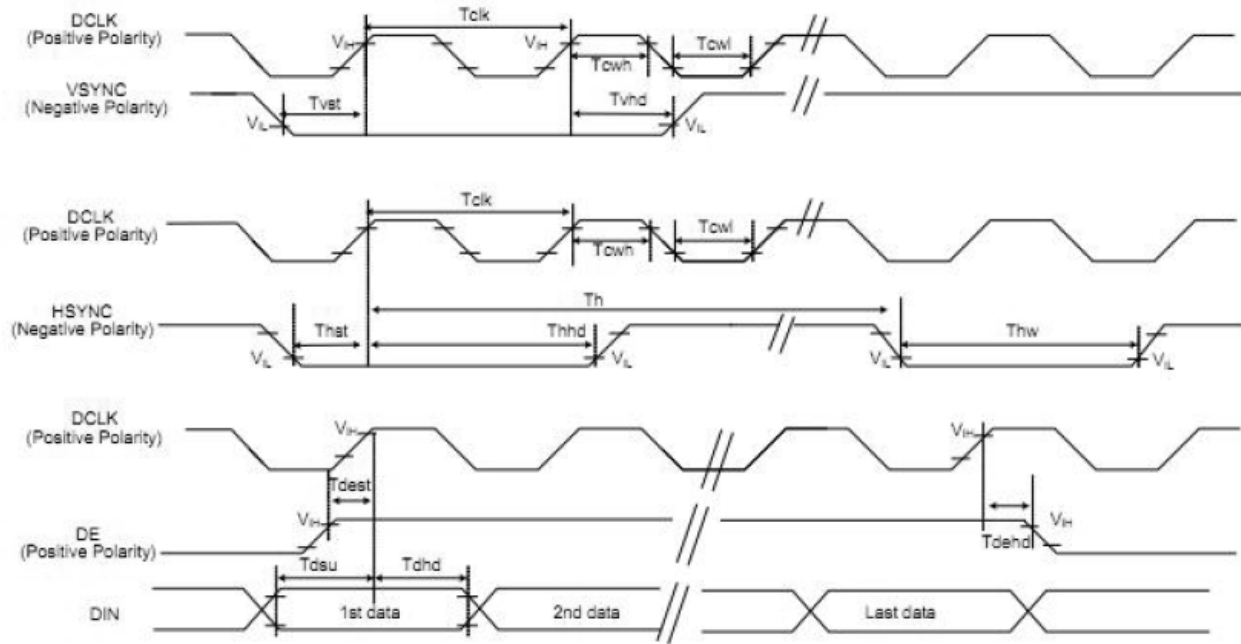


Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK Pulse Duty	Tcw	40	50	60	%	
HSYNC Width	Thw	2	-	-	DCLK	
HSYNC Period	Th	55	60	65	us	
VSYNC Setup Time	Tvst	12	-	-	ns	
VSYNC Hold Time	Tvhd	12	-	-	ns	
HSYNC Setup Time	Thst	12	-	-	ns	
HSYNC Hold Time	Thhd	12	-	-	ns	
Data Setup Time	Tdsu	12	-	-	ns	
Data Hold Time	Tdhd	12	-	-	ns	
DE Setup Time	Tdest	12	-	-	ns	
DE Hold Time	Tdehd	12	-	-	ns	

9.3. Parallel 24-bit RGB Input Timing Table

Parallel 24-bit RGB Interface Timing Table						
Item	Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency	Fclk	23	25	27	MHz	
HSYNC	Period Time	Th	808	816	896	DCLK
	Display Period	Thdisp	800			DCLK
	Back Porch	Thbp	4	8	48	DCLK
	Front Porch	Thfp	4	8	48	DCLK
	Pulse Width	Thw	2	4	8	DCLK
VSYNC	Period Time	Tv	488	496	504	HSYNC
	Display Period	Tvdisp	480			HSYNC
	Back Porch	Tvbp	4	8	12	HSYNC
	Front Porch	Tvfp	4	8	12	HSYNC
	Pulse Width	Tvw	2	4	8	HSYNC

10. Power on/off Sequence


1) Power On Sequence

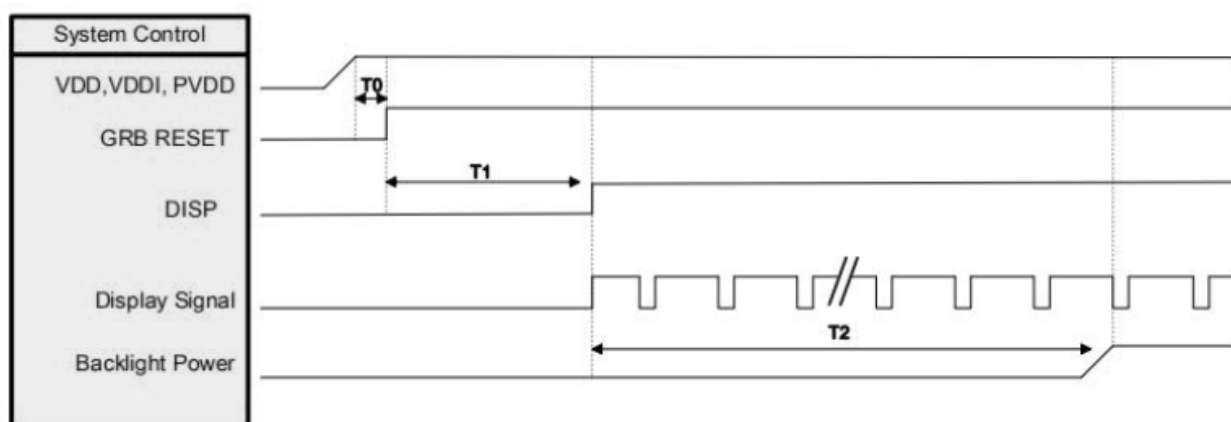

Symbol	Description	Min. Time	Unit
T0	System power stability to GRB RESET signal	0	ms
T1	GRB RESET= "High" to DISP="High"	10	ms
T2	Display Signal output to Backlight Power on	250	ms

Note: RGB interface Display signal: DCLK; VSYNC; HSYNC; DE; DR[7:0]; DG[7:0]; DB[7:0]

2) Power Off Sequence

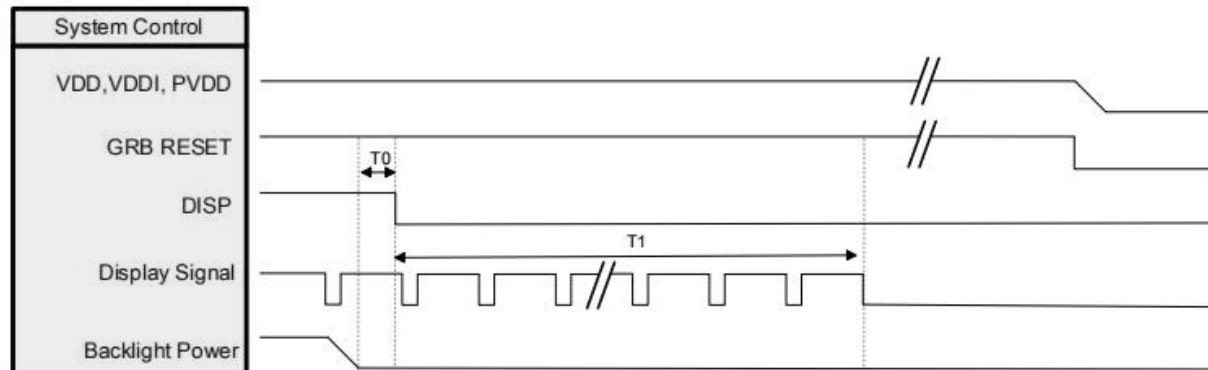

Symbol	Description	Min. Time	Unit
T0	Backlight Power off to DISP="Low"	5	ms
T1	DISP="Low" to IC internal voltage discharge complete	100	ms

Note: RGB interface Display signal: DCLK; VSYNC; HSYNC; DE; DR[7:0]; DG[7:0]; DB[7:0]

11. Quality Assurance

11.1.Purpose

This standard for Quality Assurance assures the quality of LCD module products supplied to customer.

11.2.Standard for Quality Test

11.2.1. Sampling Plan:

GB2828.1-2012

Single sampling, general inspection level II

11.2.2. Sampling Criteria:

Visual inspection: AQL 1.5.

Electrical functional: AQL 0.65.

11.2.3. Reliability Test:

Detailed requirement refer to Reliability Test Specification.

11.3.Nonconforming Analysis & Disposition

11.3.1. Nonconforming analysis:

11.3.1.1. Customer should provide overall information of non-conforming sample for their complaints.

11.3.1.2. After receipt of detailed information from customer, the analysis of nonconforming parts usually should be finished in one week.

11.3.1.3. If cannot finish the analysis on time, customer will be notified with the progress status.

11.3.2. Disposition of nonconforming:

11.3.2.1. Non-conforming product over PPM level will be replaced.

11.3.2.2. The cause of non-conformance will be analyzed. Corrective action will be discussed and implemented.

11.4.Agreement Items

Shall negotiate with customer if the following situation occurs:

11.4.1. There is any discrepancy in standard of quality assurance.

11.4.2. Additional requirement to be added in product specification.

11.4.3. Any other special problem.


11.5.Standard of the Product Visual Inspection

11.5.1. Appearance inspection:

11.5.1.1. The inspection must be under illumination about 1000 – 1500 lx, and the distance of view must be at 30cm ± 2cm.

11.5.1.2. The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.

11.5.1.3. Definition of area: A Zone: Active Area, B Zone: Viewing Area,

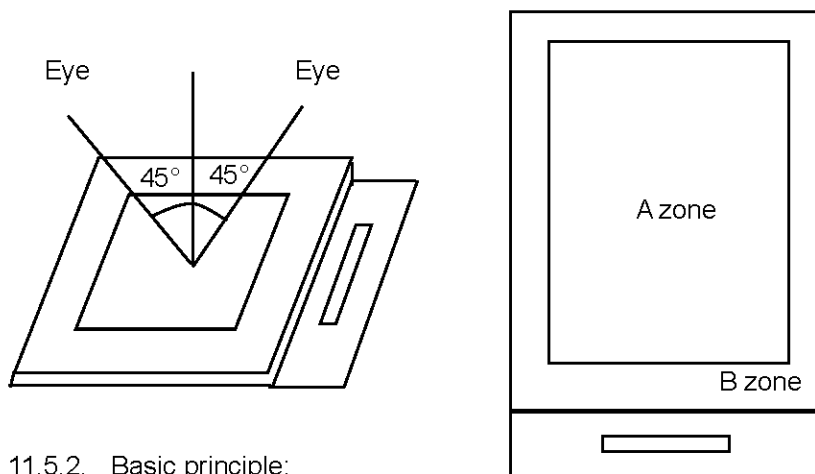



11.5.2. Basic principle:


11.5.2.1. A set of sample to indicate the limit of acceptable quality level must be discussed by both us and customer when there is any dispute happened.





11.5.2.2. New item must be added on time when it is necessary.


11.6. Inspection Specification

No.	Item	Criteria (Unit: mm)																		
01	Black / White spot Foreign material (Round type) Pinholes Stain Particles inside cell. (Minor defect)	 $\phi = (a + b) / 2$	<table><tr><th>Size</th><th>Area</th><th>Acc. Qty</th></tr><tr><td>$\phi \leq 0.20$</td><td></td><td>Ignore</td></tr><tr><td>$0.20 < \phi \leq 0.50$</td><td></td><td>$N \leq 3$</td></tr><tr><td>$0.50 < \phi$</td><td></td><td>0</td></tr></table>	Size	Area	Acc. Qty	$\phi \leq 0.20$		Ignore	$0.20 < \phi \leq 0.50$		$N \leq 3$	$0.50 < \phi$		0					
			Size	Area	Acc. Qty															
$\phi \leq 0.20$		Ignore																		
$0.20 < \phi \leq 0.50$		$N \leq 3$																		
$0.50 < \phi$		0																		
		Distance between 2 defects should more than 5mm apart.																		
02	Electrical Defect (Minor defect)	<table><tr><td rowspan="2">Bright dot</td><td>Display Area</td><td>Total</td><td rowspan="3">Note1</td></tr><tr><td>$N \leq 2$</td><td>$N \leq 2$</td></tr><tr><td>Dark dot</td><td>$N \leq 4$</td><td>$N \leq 4$</td></tr><tr><td>Total dot</td><td>$N \leq 4$</td><td>$N \leq 4$</td></tr><tr><td>Mura</td><td colspan="2">Not visible through 5% ND filters.</td><td>Note 2</td></tr></table>	Bright dot	Display Area	Total	Note1	$N \leq 2$	$N \leq 2$	Dark dot	$N \leq 4$	$N \leq 4$	Total dot	$N \leq 4$	$N \leq 4$	Mura	Not visible through 5% ND filters.		Note 2		
		Bright dot		Display Area	Total		Note1													
			$N \leq 2$	$N \leq 2$																
		Dark dot	$N \leq 4$	$N \leq 4$																
		Total dot	$N \leq 4$	$N \leq 4$																
Mura	Not visible through 5% ND filters.		Note 2																	
Remark:																				
1. Bright dot caused by scratch and foreign object accords to item 1.																				

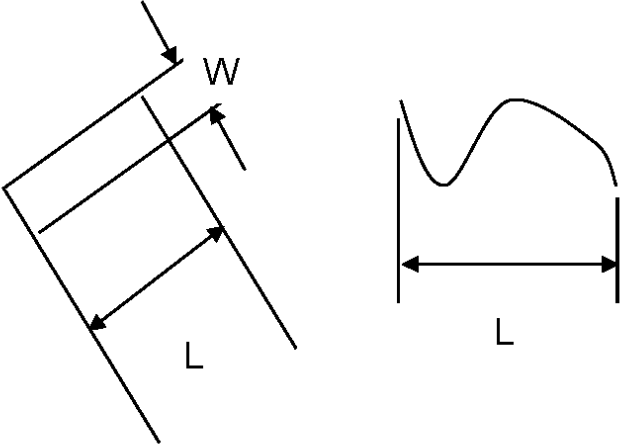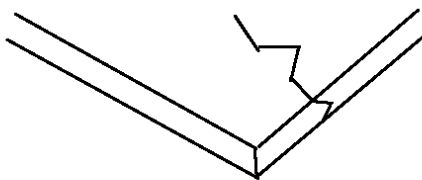03	Black and White line Scratch Foreign material (Line type) (Minor defect)	 <table border="1" data-bbox="614 705 1241 969"> <thead> <tr> <th>Length</th><th>Width</th><th>Acc. Qty</th></tr> </thead> <tbody> <tr> <td>/</td><td>$W \leq 0.1$</td><td>Ignore</td></tr> <tr> <td>$L \leq 2.5$</td><td>$0.1 < W \leq 0.2$</td><td>3</td></tr> <tr> <td>$L > 2.5$</td><td>$0.2 < W$</td><td>0</td></tr> <tr> <td colspan="2">Total</td><td>3</td></tr> </tbody> </table> Distance between 2 defects should more than 3mm apart. Scratches not viewable through the back of the display are acceptable.	Length	Width	Acc. Qty	/	$W \leq 0.1$	Ignore	$L \leq 2.5$	$0.1 < W \leq 0.2$	3	$L > 2.5$	$0.2 < W$	0	Total		3
Length	Width	Acc. Qty															
/	$W \leq 0.1$	Ignore															
$L \leq 2.5$	$0.1 < W \leq 0.2$	3															
$L > 2.5$	$0.2 < W$	0															
Total		3															
04	Glass Crack (Minor defect)	 Crack is potential to enlarge, any type is not allowed.															

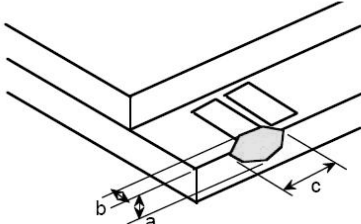05	Glass Chipping Pad Area: (Minor defect)		<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c > 3.0, b < 1.0$</td><td>1</td></tr><tr><td>$c < 3.0, b < 1.0$</td><td>3</td></tr><tr><td colspan="2">$a < \text{Glass Thickness}$</td></tr></table>	Length and Width	Acc. Qty	$c > 3.0, b < 1.0$	1	$c < 3.0, b < 1.0$	3	$a < \text{Glass Thickness}$	
	Length and Width	Acc. Qty									
$c > 3.0, b < 1.0$	1										
$c < 3.0, b < 1.0$	3										
$a < \text{Glass Thickness}$											

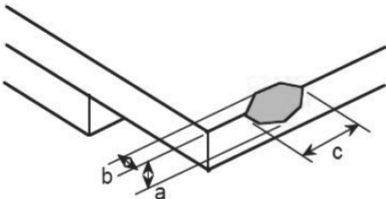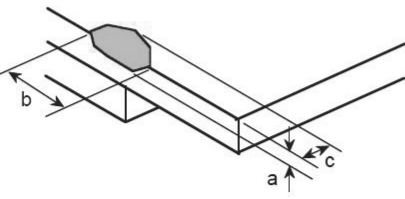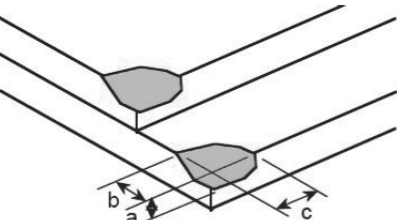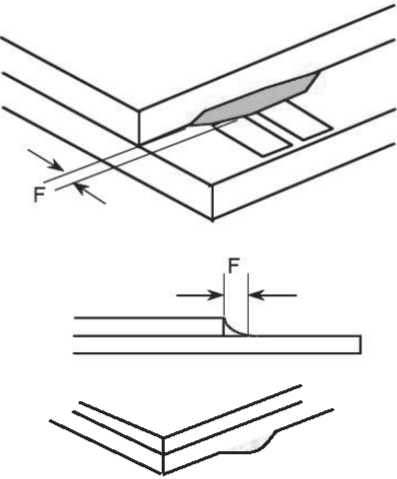06	Glass Chipping Rear of Pad Area: (Minor defect) 	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c > 3.0, b < 1.0$</td><td>1</td></tr><tr><td>$c < 3.0, b < 1.0$</td><td>2</td></tr><tr><td>$c < 3.0, b < 0.5$</td><td>4</td></tr><tr><td colspan="2">$a < \text{Glass Thickness}$</td></tr></table>	Length and Width	Acc. Qty	$c > 3.0, b < 1.0$	1	$c < 3.0, b < 1.0$	2	$c < 3.0, b < 0.5$	4	$a < \text{Glass Thickness}$	
Length and Width	Acc. Qty											
$c > 3.0, b < 1.0$	1											
$c < 3.0, b < 1.0$	2											
$c < 3.0, b < 0.5$	4											
$a < \text{Glass Thickness}$												
07	Glass Chipping Except Pad Area: (Minor defect) 	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c > 3.0, b < 1.0$</td><td>1</td></tr><tr><td>$c < 3.0, b < 1.0$</td><td>2</td></tr><tr><td>$c < 3.0, b < 0.5$</td><td>4</td></tr><tr><td colspan="2">$a < \text{Glass Thickness}$</td></tr></table>	Length and Width	Acc. Qty	$c > 3.0, b < 1.0$	1	$c < 3.0, b < 1.0$	2	$c < 3.0, b < 0.5$	4	$a < \text{Glass Thickness}$	
Length and Width	Acc. Qty											
$c > 3.0, b < 1.0$	1											
$c < 3.0, b < 1.0$	2											
$c < 3.0, b < 0.5$	4											
$a < \text{Glass Thickness}$												
08	Glass Corner Chipping: (Minor defect) 	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c < 3.0, b < 3.0$</td><td>Ignore</td></tr><tr><td colspan="2">$a < \text{Glass Thickness}$</td></tr></table>	Length and Width	Acc. Qty	$c < 3.0, b < 3.0$	Ignore	$a < \text{Glass Thickness}$					
Length and Width	Acc. Qty											
$c < 3.0, b < 3.0$	Ignore											
$a < \text{Glass Thickness}$												
09	Glass Burr: (Minor defect) 	<table><tr><th>Length</th><th>Acc. Qty</th></tr><tr><td>$F < 1.0$</td><td>Ignore</td></tr></table> Glass burr don't affect assemble and module dimension.	Length	Acc. Qty	$F < 1.0$	Ignore						
Length	Acc. Qty											
$F < 1.0$	Ignore											

10	FPC Defect: (Minor defect) 	10.1 Dent, pinhole width $a < w/3$. (w: circuitry width.) 10.2 Open circuit is unacceptable. 10.3 No oxidation, contamination and distortion.								
11	Bubble on Polarizer (Minor defect)	<table><tr><th>Diameter</th><th>Acc. Qty</th></tr><tr><td>$\varphi \leq 0.30$</td><td>Ignore</td></tr><tr><td>$0.30 < \varphi \leq 0.50$</td><td>$N \leq 2$</td></tr><tr><td>$0.50 < \varphi$</td><td>$N = 0$</td></tr></table>	Diameter	Acc. Qty	$\varphi \leq 0.30$	Ignore	$0.30 < \varphi \leq 0.50$	$N \leq 2$	$0.50 < \varphi$	$N = 0$
Diameter	Acc. Qty									
$\varphi \leq 0.30$	Ignore									
$0.30 < \varphi \leq 0.50$	$N \leq 2$									
$0.50 < \varphi$	$N = 0$									
12	Dent on Polarizer (Minor defect)	<table><tr><th>Diameter</th><th>Acc. Qty</th></tr><tr><td>$\varphi \leq 0.25$</td><td>Ignore</td></tr><tr><td>$0.25 < \varphi \leq 0.50$</td><td>$N \leq 4$</td></tr><tr><td>$0.50 < \varphi$</td><td>None</td></tr></table>	Diameter	Acc. Qty	$\varphi \leq 0.25$	Ignore	$0.25 < \varphi \leq 0.50$	$N \leq 4$	$0.50 < \varphi$	None
Diameter	Acc. Qty									
$\varphi \leq 0.25$	Ignore									
$0.25 < \varphi \leq 0.50$	$N \leq 4$									
$0.50 < \varphi$	None									
13	Bezel	13.1 No rust, distortion on the Bezel. 13.2 No visible fingerprints, stains or other contamination.								
14	PCB	14.1 No distortion or contamination on PCB terminals. 14.2 All components on PCB must same as documented on the BOM/component layout. 14.3 Follow IPC-A-600F.								
15	Soldering	Follow IPC-A-610C standard								
16	Electrical Defect (Major defect)	The below defects must be rejected. 16.1 Missing vertical / horizontal segment, 16.2 Abnormal Display. 16.3 No function or no display. 16.4 Current exceeds product specifications. 16.5 LCD viewing angle defect. 16.6 No Backlight. 16.7 Dark Backlight. 16.8 Touch Panel no function.								

Remark: LCD Panel Broken shall be rejected. Defect out of LCD viewing area is acceptable.

11.7. Classification of Defects

- 11.7.1. Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.
- 11.7.2. Two minor defects are equal to one major in lot sampling inspection.


11.8. Identification/marketing criteria

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

11.9. Packing

- 11.9.1. There should be no damage of the outside carton box, each packaging box should have one identical label.
- 11.9.2. Modules inside package box should have compliant mark.
- 11.9.3. All direct package materials shall offer ESD protection.

Note1: Bright dot is defined as the defective area of the dot is larger than 50% of one sub-pixel area.

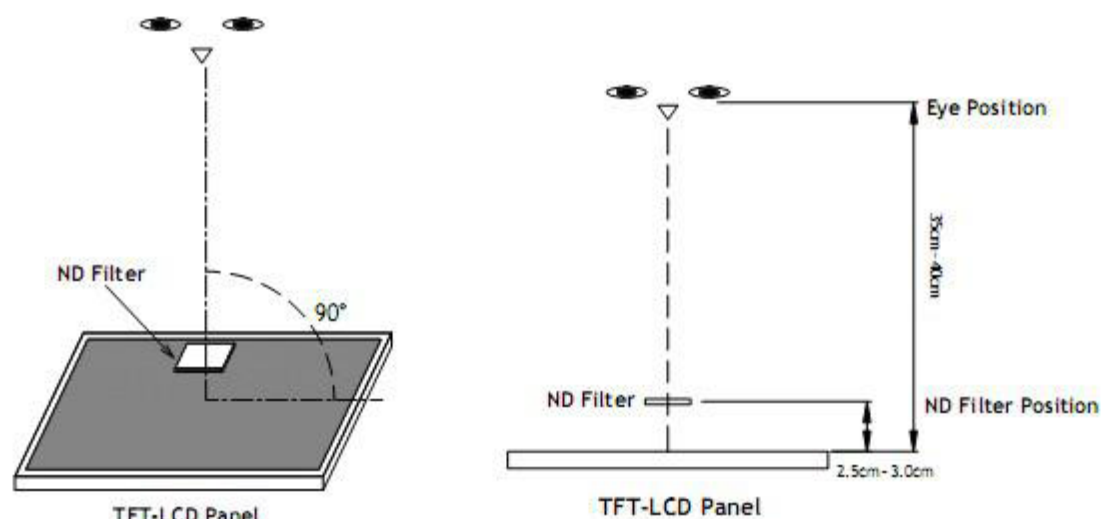

Bright dot: The bright dot size defect at black display pattern. It can be recognized by 2% transparency of filter when the distance between eyes and panel is $350\text{mm} \pm 50\text{mm}$.

Dark dot: Cyan, Magenta or Yellow dot size defect at white display pattern. It can be recognized by 5% transparency of filter when the distance between eyes and panel is $350\text{mm} \pm 50\text{mm}$.

Note2: Mura on display which appears darker / brighter against background brightness on parts of display area.

12. Reliability Specification

No	Item	Condition	Quantity	Criteria
1	High Temperature Operating	70℃, 96Hrs	2	GB/T2423.2-2008
2	Low Temperature Operating	-20℃, 96Hrs	2	GB/T2423.1-2008
3	High Humidity Storage	50℃, 90%RH, 96Hrs	2	GB/T2423.3-2016
4	High Temperature Storage	80℃, 96Hrs	2	GB/T2423.2-2008
5	Low Temperature Storage	-30℃, 96Hrs	2	GB/T2423.1-2008
6	Thermal Cycling Test Storage	-20℃, 60min ~ 70℃, 60min, 20 cycles.	2	GB/T2423.22-2012
7	Packing vibration	Frequency range:10Hz~50Hz Acceleration of gravity:5G X, Y, Z 30 min for each direction.	-	GB/T5170.14-2009
8	Electrical Static Discharge	Air: $\pm 4KV$ 150pF/330 Ω 5 times Contact: $\pm 2KV$ 150pF/330 Ω 5 times	2	GB/T17626.2-2018
9	Drop Test (Packaged)	Height:80 cm, 1 corner, 3 edges, 6 surfaces.	-	GB/T2423.8-1995

Note1. No defection cosmetic and operational function allowable.

Note2. Total current Consumption should be below double of initial value

13. Precautions and Warranty

13.1.Safety

- 13.1.1. The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.
- 13.1.2. Since the liquid crystal cells are made of glass, do not apply strong impact on them. Handle with care.

13.2.Handling

- 13.2.1. Reverse and use within ratings in order to keep performance and prevent damage.
- 13.2.2. Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

13.3.Storage

- 13.3.1. Do not store the LCD module beyond the specified temperature ranges.
- 13.3.2. Strong light exposure causes degradation of polarizer and color filter.

13.4.Metal Pin (Apply to Products with Metal Pins)

13.4.1. Pins of LCD and Backlight

- 13.4.1.1. Solder tip can touch and press on the tip of Pin LEAD during the soldering

13.4.1.2. Recommended Soldering Conditions

Solder Type: Sn96.3~94-Ag3.3~4.3-Cu0.4~1.1



Maximum Solder Temperature: 370℃

Maximum Solder Time: 3s at the maximum temperature

Recommended Soldering Temp: 350±20℃

Typical Soldering Time: ≤3s

13.4.1.3. Solder Wetting



13.4.2. Pins of EL

- 13.4.2.1. Solder tip can touch and press on the tip of EL leads during soldering.

- 13.4.2.2. No Solder Paste on the soldering pad on the motherboard is recommended.

13.4.2.3. Recommended Soldering Conditions

Solder type: Nippon Alimit Leadfree SR-34, size 0.5mm

Recommended Solder Temperature: 270~290℃


Typical Soldering Time: ≤2s

Minimum solder distance from EL lamp (body):2.0mm


- 13.4.2.4. No horizontal press on the EL leads during soldering.

- 13.4.2.5. 180° bend EL leads three times is not allowed.

13.4.2.6. Solder Wetting




Recommended




Not Recommended

13.4.2.7. The type of the solder iron:




Recommended



Not Recommended

13.4.2.8. Solder Pad



13.5. Operation

- 13.5.1. Do not drive LCD with DC voltage
- 13.5.2. Response time will increase below lower temperature
- 13.5.3. Display may change color with different temperature
- 13.5.4. Mechanical disturbance during operation, such as pressing on the display area, may cause the segments to appear "fractured".
- 13.5.5. Do not connect or disconnect the LCM to or from the system when power is on.
- 13.5.6. Never use the LCM under abnormal condition of high temperature and high humidity.
- 13.5.7. Module has high frequency circuits. Sufficient suppression to the electromagnetic interface shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- 13.5.8. *Do not display the fixed pattern for long time (we suggest the time not longer than one hour) because it will develop image sticking due to the TFT structure.*

13.6. Static Electricity

- 13.6.1. CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.
- 13.6.2. The normal static prevention measures should be observed for work clothes and benches.
- 13.6.3. The module should be kept into anti-static bags or other containers resistant to static for storage.

13.7. Limited Warranty

- 13.7.1. Our warranty liability is limited to repair and/or replacement. We will not be responsible for any consequential loss.
- 13.7.2. If possible, we suggest customer to use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used.
- 13.7.3. After the product shipped, any product quality issues must be feedback within three months, otherwise, we will not be responsible for the subsequent or consequential events.

14. Packaging

TBD