

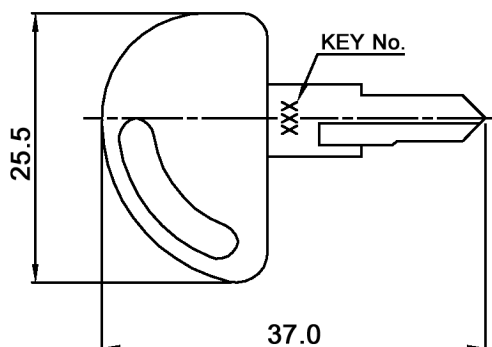


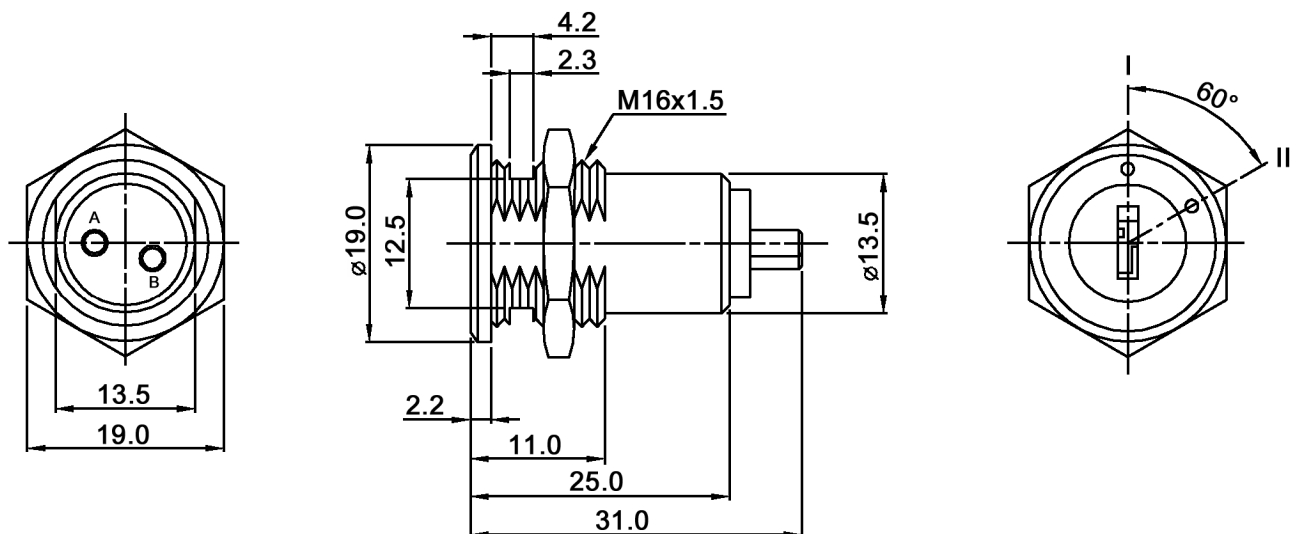

RECOMMENDED
HOLE SIZE



Specifications:

Contact rating: 0.2 A, 125 V AC
 Contact resistance: 10 mOhm max.
 Insulation resistance: 200 MOhm min.
 Dielectric strength: 1000 V, 50 Hz for the duration of 1 minute
 Operating temperature: -20°C to +70°C
 Mechanical life: min. 10 000 cycles
 Switching function: off - on
 Material: Case: zinc alloy, chromium plated
 Contacts / terminals: silver plated
 Key: brass, nickel plated, POM-cover

Key removable: in all positions

Number of keys supplied: 2

Compliance: RohS III (2015/863/EU)

Tolerances: >0: ±0.3 mm >6: ±0.5 mm >30: ±0.8 mm			Date	Name	MRK 332		
			08/20	dr			
					30 44 63		
			knitter-switch		Page		
					1/1		
Modifications		Date	Name				