

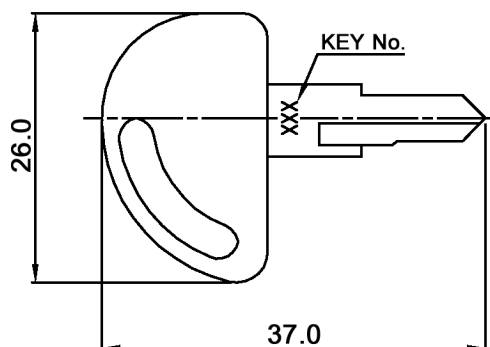


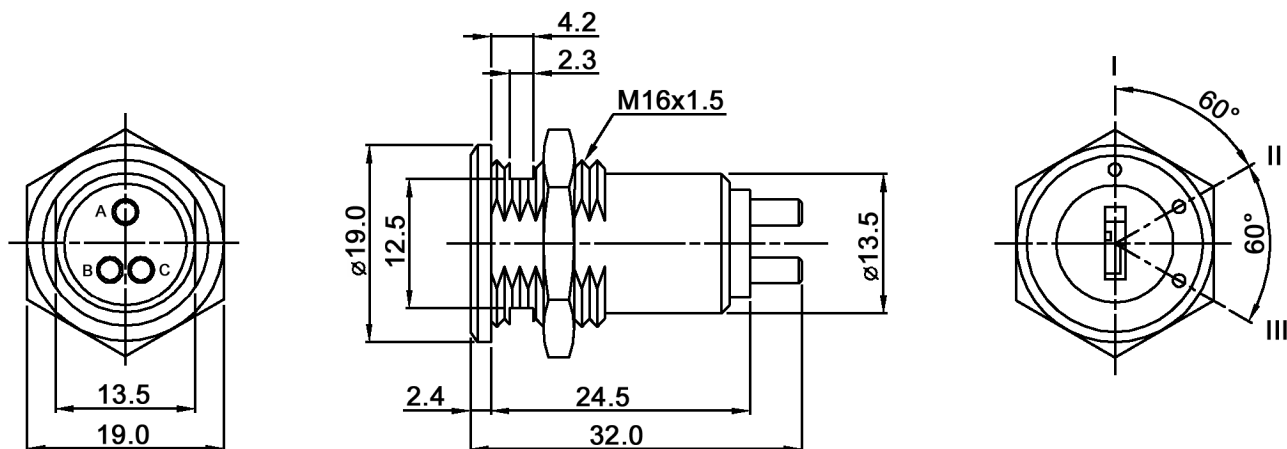

RECOMMENDED
HOLE SIZE



Specifications:

Contact rating: 0.2 A, 125 V AC
Contact resistance: 10 mOhm max.
Insulation resistance: 200 MOhm min.
Dielectric strength: 1000 V, 50 Hz for the duration of 1 minute
Operating temperature: -20°C to +70°C
Mechanical life: min. 10 000 cycles
Switching function: off - on - on (terminal connection none, A-B, A-C)
Material: Case: zinc alloy, chromium plated
Contacts / terminals: silver plated
Key: brass, nickel plated, POM-cover

Key removable: in all positions

Number of keys supplied: 2

Compliance: RohS III (2015/863/EU)

Tolerances: >0: ±0.3 mm >6: ±0.5 mm >30: ±0.8 mm			Date	Name	MRK 333		
			07/04	us			
					30 04 65		
Revised	08/20	dr	knitter-switch			Page	
Marking	08/04	dr					
RoHS compliant	10/09	dr					
Modifications	Date	Name				1/1	