


Subminiature Rotary Coded Switches

Specifications:


Contact rating:	24 V DC, 25 mA switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Mechanical life:	minimum 2000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PBT blue, meets UL 94 V-0, washable, rotor: white; inverse type red
Mounting:	on pc-board
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C

Models: Code


DRS 20010	BCD
DRS 20110	BCD Inverse
DRS 20016	Hexadecimal
DRS 20116	Hexadecimal Inverse

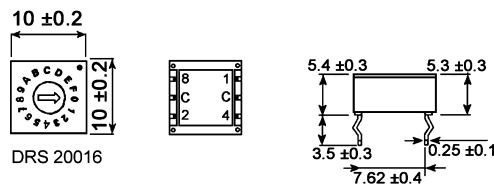


DRS 21010	BCD
DRS 21110	BCD Inverse
DRS 21016	Hexadecimal
DRS 21116	Hexadecimal Inverse

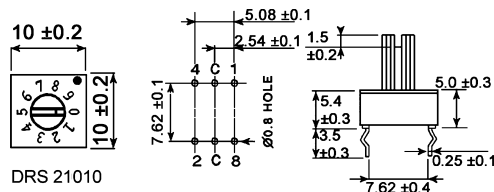


DRR 20010	BCD
DRR 20110	BCD Inverse
DRR 20016	Hexadecimal
DRR 20116	Hexadecimal Inverse

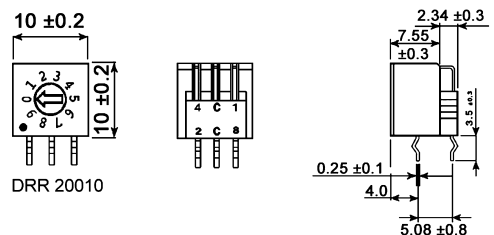

DRR 21010	BCD
DRR 21110	BCD Inverse
DRR 21016	Hexadecimal
DRR 21116	Hexadecimal Inverse

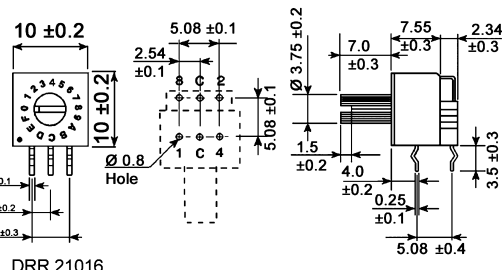

Special version:



Spacing 2.54 mm
Additional to type number: -1
Example of order: DRR 20010-1

washable

