



P.C.B. MOUNTING HOLE DIMENSIONS

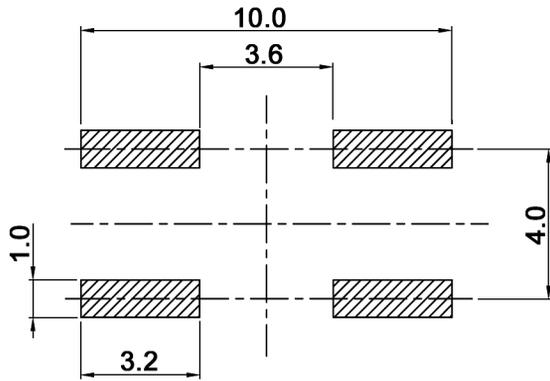

CIRCUIT DIAGRAM

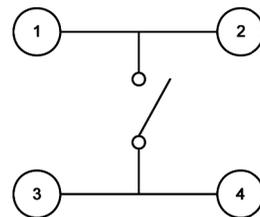

Compliance: RohS III (2015/863/EU)

Tolerances:	up to 10: ±0.2 mm	Date	Name
	above 10-50: ±0.3 mm	11/20	dr
Table "x"	02/26	dr	
Modifications	Date	Name	

TSSF 61 x-J-LF

knitter-switch

30 45 30


Page

1/3

Specifications:

Contact rating: 50 mA, 12 V DC
Contact resistance: 200 mOhm max.
Insulation resistance: 100 MOhm min. at 100 V DC for 1 minute
Dielectric strength: 250 V AC (50/60 Hz, 2 mA) for 1 minute
Operating temperature: -40°C to +85°C
Material: Stem: PPA, red
 Frame: SUS, natural
 Contact plate: SUS, silver plated
 Case: LCP, black
 Terminal: brass strip, silver plated

Soldering conditions:


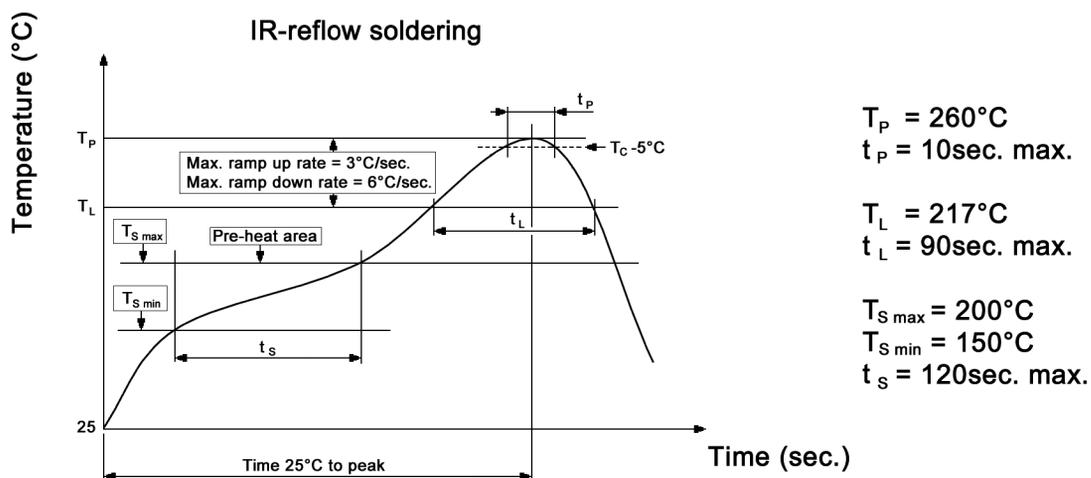


x	Operating force (N)	Electrical life
N	1.6 +/-0.5	1 000 000 cycles
R	2.5 +/-0.7	100 000 cycles
S	3.5 +/-1.0	100 000 cycles


Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2 mm above 10-50: ±0.3 mm	Date	Name	TSSF 61 x-J-LF
	11/20	dr	
Table "x"	02/26	dr	30 45 30
Modifications	Date	Name	
			Page 2/3


Packaging:

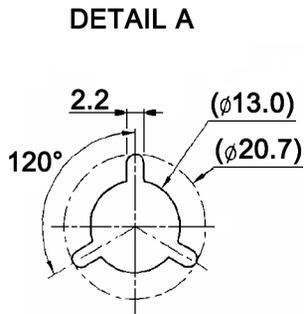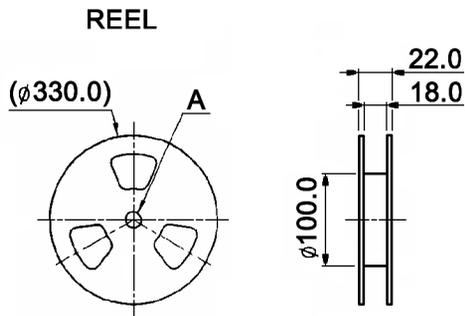

CARRIER TAPE

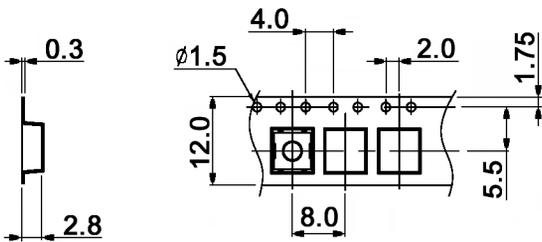

COVER TAPE



Packaging unit: 2500 pcs. / reel
Compliance: RohS III (2015/863/EU)

Tolerances:	up to 10: ±0.2 mm	Date	Name
	above 10-50: ±0.3 mm	11/20	dr
Table "x"	02/26	dr	
Modifications	Date	Name	

TSSF 61 x-J-LF

knitter-switch

30 45 30

Page

3/3